



# Bullets Without Equal!

## Scirocco®

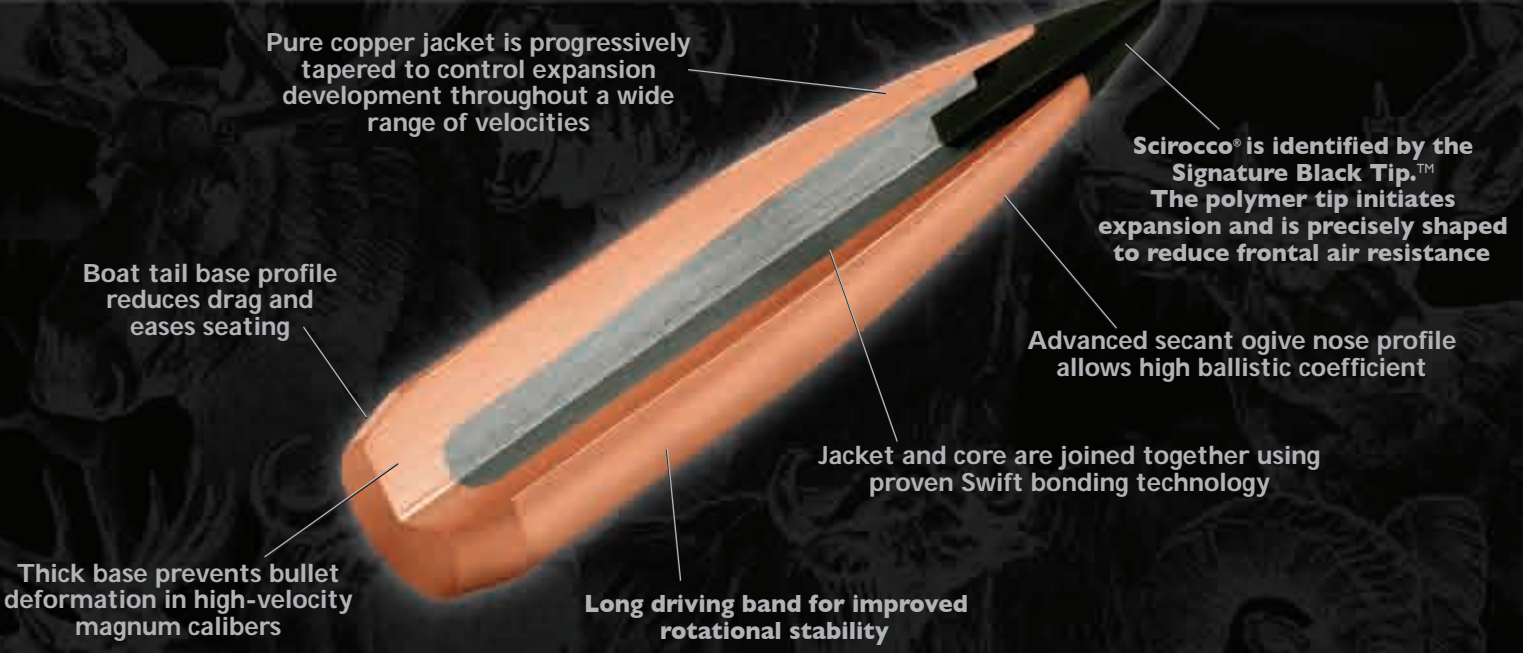

## A-Frame®

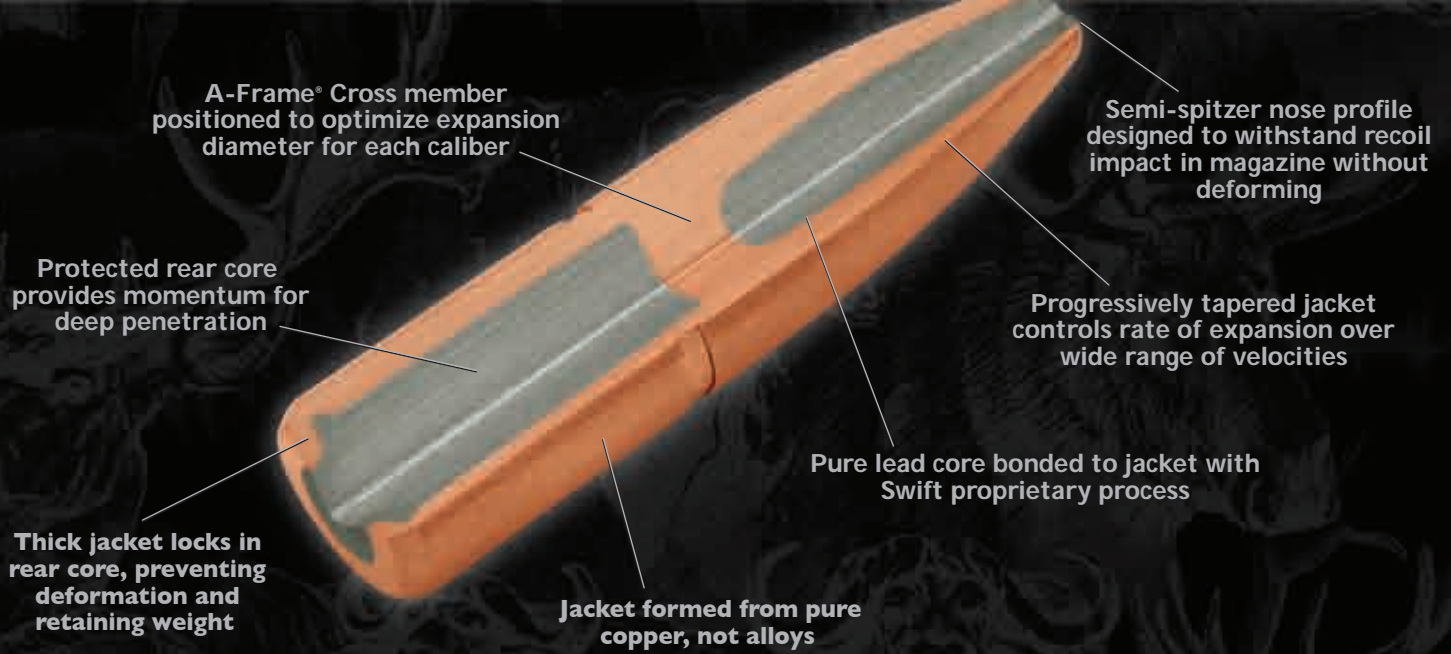

One Thousand One Swift Avenue • P.O. Box 27 • Quinter, KS, 67752 • Ph: 785.754.3959 [www.swiftbullet.com](http://www.swiftbullet.com)

### ← Swift Rifle, Revolver, and Muzzle Loader Bullet Specifications →

Cal.	Scirocco Rifle Bullet	Dia.	Wt. (gr.)	Profile	Sec. Den.	Ball. Coef.	Cal.	A-Frame Rifle Bullet	Dia.	Wt. (gr.)	Profile	Sec. Den.	Ball. Coef.
224		.224"	75	BTS	.214	.419	35		.358"	250	AF/SS	.279	.347
6mm		.243"	90	BTS	.218	.419	35		.358"	280	AF/SS	.312	.388
25		.257"	100	BTS	.216	.429	9.3mm		.366"	250	AF/SS	.267	.285
6.5mm		.264"	130	BTS	.266	.571	9.3mm		.366"	300	AF/SS	.320	.342
270		.277"	130	BTS	.242	.450	375		.375"	250	AF/SS	.254	.271
7mm		.284"	150	BTS	.266	.515	375		.375"	270	AF/SS	.274	.349
30		.308"	150	BTS	.226	.430	375		.375"	300	AF/SS	.305	.325
30		.308"	165	BTS	.248	.470	416		.416"	350	AF/SS	.289	.321
30		.308"	180	BTS	.271	.520	416		.416"	400	AF/SS	.330	.367
338		.338"	210	BTS	.263	.507	404		.423"	400	AF/SS	.319	.375
							458		.458"	350	AF/FN	.238	.170
							458		.458"	400	AF/FN	.272	.258
							458		.458"	450	AF/SS	.307	.325
							458		.458"	500	AF/SS	.341	.361
							470		.475"	500	AF/RN	.329	.364
Cal.	A-Frame Rifle Bullet	Dia.	Wt. (gr.)	Profile	Sec. Den.	Ball. Coef.	Cal.	A-Frame Revolver Bullet	Dia.	Wt. (gr.)	Profile	Sec. Den.	Ball. Coef.
25		.257"	100	AF/SS	.216	.318	44		.430"	240	AF/HP	.185	.119
25		.257"	120	AF/SS	.260	.382	44		.430"	280	AF/HP	.216	.139
6.5		.264"	120	AF/SS	.246	.344	44		.430"	300	AF/HP	.232	.147
6.5		.264"	140	AF/SS	.287	.401	45		.452"	265	AF/HP	.185	.129
270		.277"	130	AF/SS	.242	.323	45		.452"	300	AF/HP	.210	.153
270		.277"	140	AF/SS	.261	.414	45		.452"	325	AF/HP	.227	.171
270		.277"	150	AF/SS	.279	.444							
7mm		.284"	140	AF/SS	.248	.335							
7mm		.284"	160	AF/SS	.283	.450							
7mm		.284"	175	AF/SS	.310	.493							
30		.308"	165	AF/SS	.248	.367							
30		.308"	180	AF/SS	.271	.400							
30		.308"	200	AF/SS	.301	.444							
8mm		.323"	200	AF/SS	.274	.357							
8mm		.323"	220	AF/SS	.301	.393							
338		.338"	225	AF/SS	.281	.384							
338		.338"	250	AF/SS	.313	.427							
338		.338"	275	AF/SS	.344	.469							
35		.358"	225	AF/SS	.251	.312							
Cal.	A-Frame Muzzle Loader	Dia.	Wt. (gr.)	Profile	Sec. Den.	Ball. Coef.	Cal.	A-Frame Muzzle Loader	Dia.	Wt. (gr.)	Profile	Sec. Den.	Ball. Coef.
50		.430"	240	AF/HP	.185	.119	50		.430"	300	AF/HP	.232	.147
50		.430"	300	AF/HP	.232	.147	54		.452"	265	AF/HP	.185	.129
54		.452"	265	AF/HP	.185	.129	54		.452"	325	AF/HP	.227	.153

BTS = Boat Tail Spitzer AF/SS = A-Frame Semi-Spitzer AF/FN = A-Frame Flat Nose AF/RN = A-Frame Round Nose AF/HP = A-Frame Hollow Point