



DAVIS INDUSTRIES

15150 Sierra Bonita Lane  
Chino, California 91710  
(909) 597-4726

## READ THESE INSTRUCTIONS BEFORE USING THIS GUN



5/97

**WARNING**  
PLACE HAMMER IN  
HALF COCK POSITION AND  
ENGAGE SAFETY BEFORE  
LOADING & UNLOADING

MODEL D-22, DM-22, D-25, AND D-32

### ALL FIREARMS ARE DANGEROUS PLEASE BE CAREFUL

We provide reasonable care in the manufacture of this pistol, but assume no responsibility for its care handling and use.

Virtually all accidents are caused by the misuse or mishandling by the user.

Never place your finger on the trigger unless you are ready to shoot the pistol.

**CAUTION:** We strongly advise that you familiarize yourself with all the mechanisms of this, or any gun, before putting any ammunition into it. For your safety before loading or firing this pistol, make sure there are **NO OBSTRUCTIONS** in the Barrel and wipe away all grease and foreign materials from its bore.

**CAUTION:** If you do not intend to shoot immediately, place the hammer in **HALF-COCK** position with **SAFETY ENGAGED** and remove the cartridges from the barrel chamber. **STORE PISTOL AND AMMO SEPARATELY OUT OF THE REACH OF CHILDREN.**

### WARNING

Do not use this derringer until you have completely read this instruction manual. We recommend that you seek competent firearms instruction before attempting to use this gun.

**To load, unload, store, or carry this gun safely, the hammer must be in the HALF-COCK position with SAFETY ENGAGED.** Failure to keep the hammer on the **HALF-COCK** position and safely on safe can result in accidental discharge causing serious injury or death.

Unload your pistol if you do not intend to shoot it immediately. **STORE PISTOL AND AMMUNITION SEPARATELY OUT OF THE REACH OF CHILDREN.**

### LOADING

- 1) Place the hammer in the **HALF-COCK position** and **ENGAGE SAFETY TO SAFE POSITION.**
- 2) Disengage the locking lever and move it to the forward position.
- 3) Pull the barrel back exposing the breech, insert two cartridges.
- 4) Be sure the hammer is still in the **HALF-COCK position**, and **SAFETY ENGAGED**, lower the barrel into the frame and re-engage the locking lever.
- 5) To unload use the same procedure as outlined above. Cartridges are removed from the chambers by pressing down on the extractor on side of barrel and sliding it rearward.

### AMMUNITION

The derringer was designed to fire standard factory ammunition only. **DO NOT FIRE RELOADED, HOT LOADED, OR PLUS "P" CARTRIDGES.** These types of ammunition can be dangerous to you and your derringer.

### RECOMMENDED AMMUNITION

FOR BEST SHOOTING AND FUNCTION, WE RECOMMEND FEDERAL OR AMERICAN AMMUNITION. (On all Davis Products).

### IMPORTANT D-25, D-32


When loading and unloading, push extractor all the way open.

### DRY FIRING

Never dry fire this derringer (firing the gun with no ammo in the chambers). Dry firing damages the firing pins and mechanisms.

## PRECAUTIONS


- 1) Keep this derringer away from children.
- 2) Do not drop or mishandle this gun when loaded, as it may fire if dropped.
- 3) Always keep this derringer in the **HALF COCK** hammer position and **SAFETY ENGAGED**.
- 4) Always be sure of your target.
- 5) Never point this gun at anything that is your not your intended target.
- 6) Do not store or carry this gun loaded.
- 7) Avoid alcohol and drugs both before and during shooting.
- 8) Treat this gun as if it is always loaded.
- 9) Store pistol and ammunition separately and out of the reach of children.

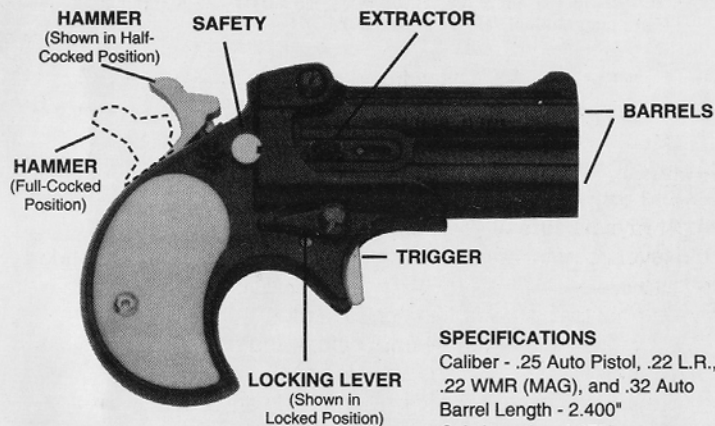

### SPECIFICATIONS

Caliber - .25 Auto Pistol, .22 L.R.,  
 .22 WMR (MAG), and .32 Auto  
 Barrel Length - 2.400"  
 O.A. Length - 4.075"  
 O.A. Height - 2.824  
 Weight - 9.5 oz.

### DERRINGER - Caliber .22 LR, .22 MAG, .25 AUTO, .32 AUTO Parts List: Model D-22, D-25 and D-32

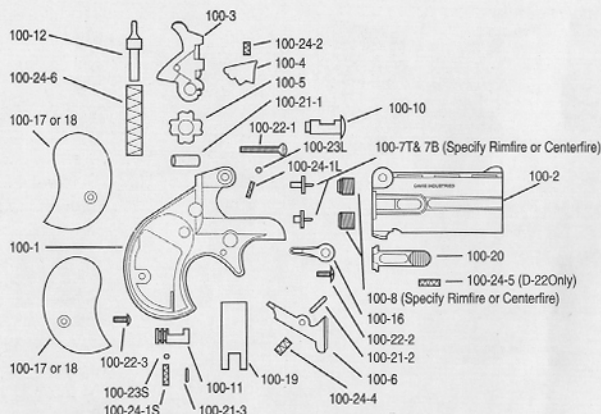

NOTE: No extractor spring in gun after S/N 480,000

STOCK NO.	PART NAME	PRICE	STOCK NO.	PART NAME	PRICE
100-1	Frame	N.A.	100-16	Locking Lever	1.50
100-2	Barrel	N.A.	100-17	Wood Grip	8.00
100-3	Hammer	8.00	100-18	Pearl Grip	7.00
100-4	Selector	6.00	100-19	Cam Spring	1.00
100-5	Cam	3.00	100-20	Extractor	N.A.
100-6	Trigger	7.00	100-21-1	Hammer Pivot Pin	1.50
100-7TC	Firing Pin, Top (for D-25, D-32 only)	3.50	100-21-2	Trigger Pin	1.50
100-7TR	Firing Pin, Top (for D-22, DM-22 only)	3.50	100-21-3	Safety Pin	1.00
100-7BC	Firing Pin, Btm (for D-25, D-32 only)	3.50	100-22-1	Hinge Screw	1.50
100-9BR	Firing Pin, Btm (for D-22, DM-22 only)	3.50	100-22-2	Lock Screw	1.00
100-8C	Firing Pin Bushings (for D-25, D-32 only)	3.50	100-22-3	Grip Screw	1.50
100-8R	Firing Pin Bushings (for D-22, DM-22 only)	3.50	100-23-S	Safety Ball	1.00
100-10	Lock	4.00	100-23-L	Lock Ball	1.00
100-11	Safety	4.00	100-24-1L	Lock Spring	1.00
100-12	Guide Pin	2.00	100-24-1S	Safety Spring	1.00
			100-24-2	Selector Spring	1.00
			100-24-4	Trigger Spring	1.00
			100-24-5	Extractor Spring	1.00
			100-24-6	Main Spring	2.00

## SHIPPING & ORDERING PARTS

**FACTORY DIRECT SERVICE:** Should your Davis pistol require factory service, the following suggestions will prevent loss of time in the servicing and returning of your Davis pistol. 1. Return by U.P.S. insure for full value. 2. A letter of instruction on your problem 3. Your name and return address.

**NOTES:** 1. Items No. 1, 2 & 19, Factory Replace Only 2. Specify caliber 3. Instruction Sheets are Supplied with Each Pistol and Are Available Free of Charge for the Asking.

WHEN ORDERING PARTS, ADD \$3.50 TO COVER SHIPPING AND HANDLING. CALIFORNIA RESIDENTS ADD 7.75% SALES TAX. SEND CHECK OR MONEY ORDER ONLY - NO C.O.D. ALWAYS SPECIFY THE COLOR AND SERIAL NUMBER OF YOUR GUN.

**SAFETY GLASSES SHOULD BE WORN AT ALL TIMES  
 REMEMBER, CARELESSNESS CAUSES CALAMITY.  
 LEARN TO BE A SAFE SHOOTER SO THAT YOU CAN  
 ENJOY YOUR PISTOL FOR MANY YEARS.  
 THERE ARE NO SAFE GUNS... THERE ARE ONLY  
 SAFE GUN OWNERS.**

RESPECTFULLY



DAVIS INDUSTRIES